



By *RGF*

WE ARE RGF®


# The PHI-PKG™ Air Purification System

The PHI-PKG™ package unit uses RGF's patented Photohydroionization® (PHI-CELL®) technology to reduce airborne and surface bacteria, viruses, odors, and mold.

PHI-PKG™ package units are designed specifically for use in residential and commercial applications. They utilize adjustable magnetic feet with vibration dampers to attach without fasteners to the HVAC blower unit or PKG-Rack™ System, making installation fast and simple. PHI-PKG™ package units are available with 5", 9", and 14" PHI-CELLS®



UV-C LIGHT



H<sub>2</sub>O<sub>2</sub>



MAGNETIC

## Ideal for use in:



SCHOOLS



RESTAURANTS



OFFICES





HOMES



ROOF TOP  
HVAC UNITS



HOTELS

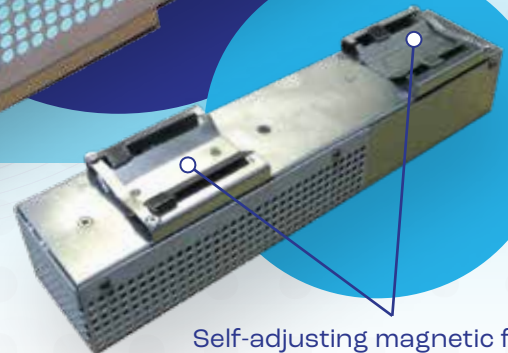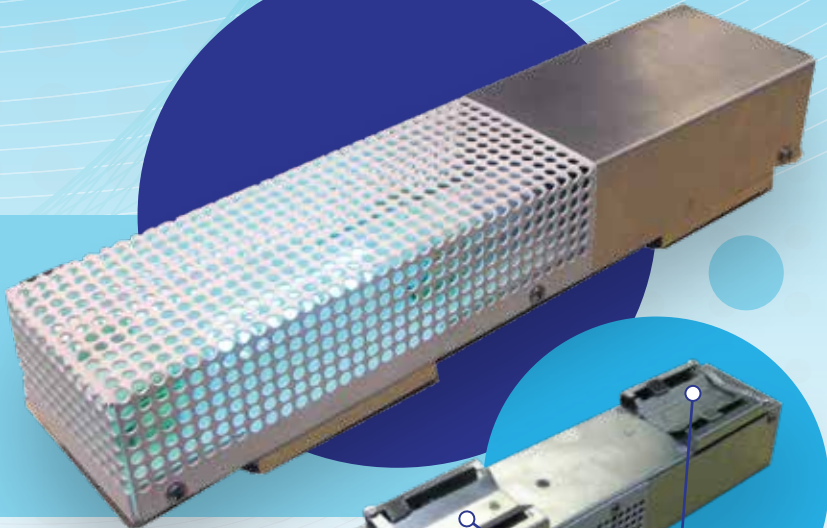

Self-adjusting magnetic feet  
with vibration dampeners



866-918-8546  
info@safetynetamerica.com

## Why Use RGF's PHI-CELL® Technology?

Photohydroionization® (PHI) is an active air treatment technology. Active air treatment is the process of reducing air and surface contaminants by recreating natural levels of airborne hydrogen peroxide in occupied areas.


RGF's patented PHI-CELL® technology combines a photocatalytic process and a multiwavelength UV source to create active air purification. The combination of UV-C light and a hydrated quad-metallic catalyst drives a reaction that produces low level, airborne hydrogen peroxide. RGF's PHI-CELL® air treatment systems are operating safely in over four million installations globally.

## PKG-Rack™ Systems

RGF's new PKG-Rack™ systems are often used for commercial installations where several PHI-PKG™ package units are required. Multiple package units are quickly and easily installed using the PKG-Rack™ system\*. PKG-Rack™ systems provide convenient installation for up to 32 PHI-PKG™ units.

Racking the PHI-PKG™ package units offers customers the ability to add active air purification to the largest commercial air handlers. See PKG-Rack™ specification sheet for more information.

- \* Unistrut not supplied
- \* PKG-Rack™ Part #: CUV-PPS-Kit

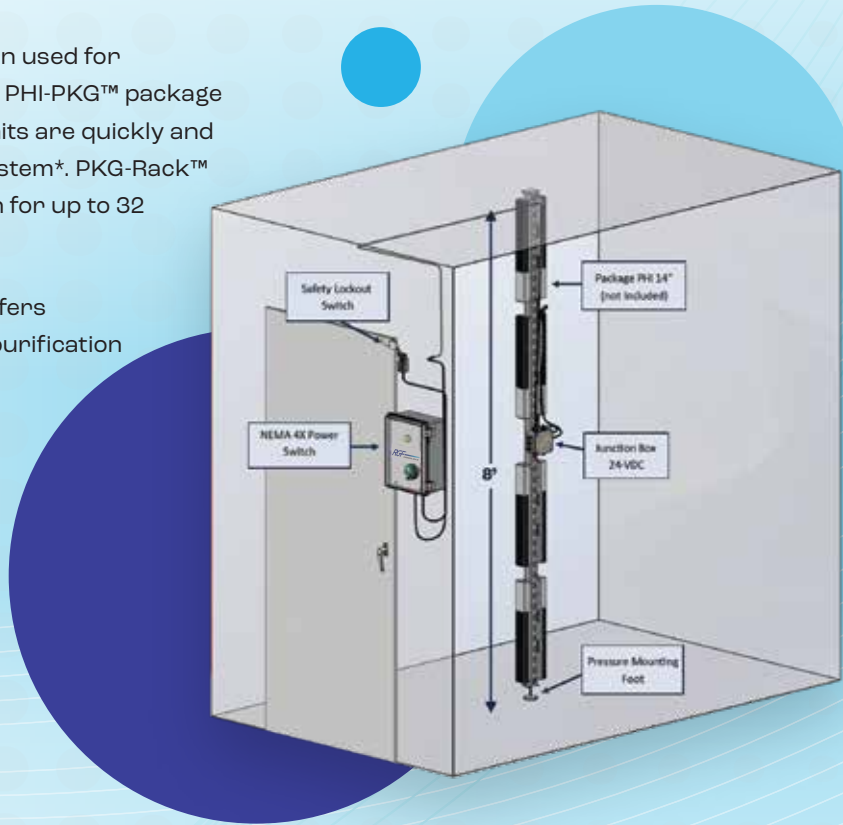

ITEM#	HVAC BLOWER SIZE	TONNAGE	AMPS	DIMENSIONS	SHIP WT.
PHI-PKG5-24V	375* - 1,200 CFM 424.7527 m <sup>3</sup> /h - 2038.813 m <sup>3</sup> /h	Up to 3.5 ton	0.48	2.25" W x 10.5" L x 1.75" D 57.15 mm x 266.7 mm x 44.45 mm	1 lb. 0.45 kg
PHI-PKG9-24V	1,200 - 3,000 CFM 2038.81 m <sup>3</sup> /h - 5097.03 m <sup>3</sup> /h	3.5 to 7.5 ton	0.70	2.25" W x 13.5" L x 1.75" D 57.15 mm x 342.9 mm x 44.45 mm	1 lb. 0.45 kg
PHI-PKG14-24V	3,000 - 8,000 CFM 5097.03 m <sup>3</sup> /h - 13592.09 m <sup>3</sup> /h	7.5 and 20 ton	0.70	2.25" W x 18.5" L x 1.75" D 57.15 mm x 469.9 mm x 44.45 mm	2 lbs. 0.90 kg

\*INSTALL UNIT IN CONJUNCTION WITH AN HVAC SYSTEM UTILIZING A MINIMUM AIR VOLUME OF 375 CFM.

### MATERIALS

Aluminum housing

### PHI-CELL® REPLACEMENT

Recommended after 2 years

### WARRANTY

2 years U.S. and Canada  
(1 year international)

### HYDROGEN PEROXIDE DISTRIBUTION

Distributed through HVAC duct work

### INSTALLATION

Installed in the HVAC supply

### ELECTRICAL

24 VAC



UL 1598:2008 (3rd Edition)  
CAN/CSA C22.2  
No.250.0:2008

Approved for sale in California